

# Differential Pressure Gauges i-tube Manometer Model A2G-30, air2guide P i-tube



WIKA Data Sheet PM 07.41

## Applications

- For dry, clean, non-aggressive gases, mainly air
- Monitoring of ventilators, blowers and filters in the HVAC and UHP industries

## Special Features

- Easy installation
- Easy mounting and demounting
- Run-out protection
- Easy to read scale



Differential Pressure Gauge air2guide P i-tube  
Model A2G-30

## Description

### Accuracy

5 Pa / 25 Pa

### Scale range

0 ... 600 Pa

### Max. pressure

200 kPa (2 bar)

### Operating temperature

-40 ... +60 °C

### Ingress protection

IP 54 per EN 60 529 / IEC 529

### Weight

420 g

## Standard version

### Liquid filling

Red, specific gravity 0.786 kg/dm<sup>3</sup> (at 15 °C), 30 ml

### Case

ABS

### Case cover

PMMA

### Screws

PC

### Gasket

NBR

### Mounting position


Vertical

### Standard accessories

- 2 fixing screws
- Filling liquid
- Red and green pressure limitation label
- 2 m PVC hose, inner diameter 4 mm

## Dimensions in mm

### Standard version

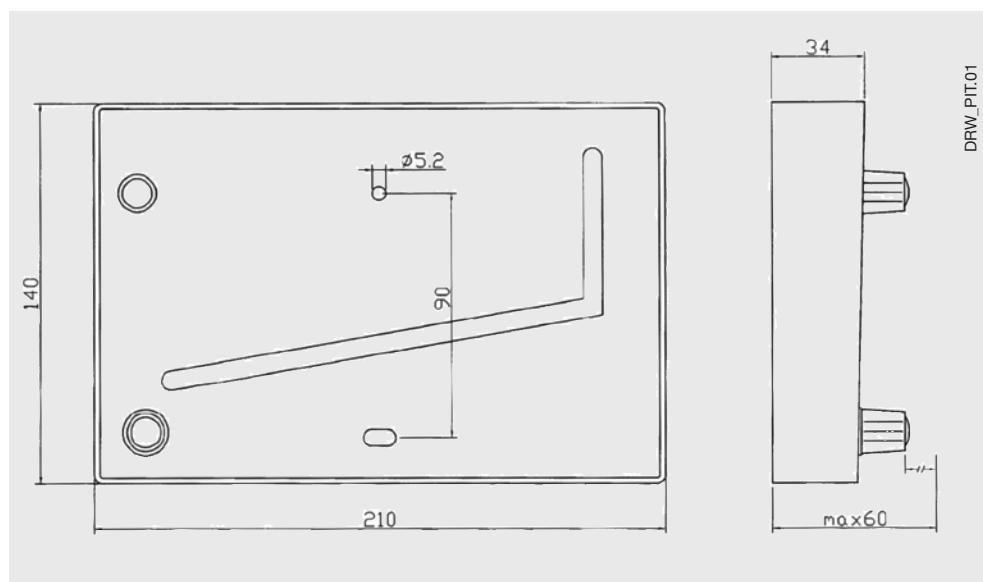

## Ordering information

### Model

Modifications may take place and materials specified may be replaced by others without prior notice.  
Specifications and dimensions given in this leaflet represent the state of engineering at the time of printing.



**WIKAL Alexander Wiegand SE & Co. KG**  
Alexander-Wiegand-Straße 30  
63911 Klingenberg/Germany  
Tel. (+49) 9372/132-0  
Fax (+49) 9372/132-406  
E-mail info@wika.de  
www.wika.de